NANA ENGINEERING

High Quality CS-GF Type Current Sensor

Bipolar power supply Busbar/Chassis mounting

# Features

High reliability

Compact and lightweight

Low power consumption

Extended measuring range

Low cost

## Open Loop Type

RoHS Compliant

## Specifications

Ta=25℃

| Product name | Code:1254 | | CS-20GF |
|---|---|---|---|
| | Symbol | Unit | |
| Nominal input current | If(n) | AT | ±200 |
| Saturation current | If(s) | AT | ±600 |
| Nominal Output Voltage | Vh | V | ±4±0.040 [at If(n)] |
| Load resistance | RL | Ω | 10k |
| Offset Voltage | Vo | V | 0±0.015 [at 0A] |
| Supply Voltage | Vcc | V DC | ±15±5% |
| Consumption Current | Icc | mA | ±22 Max. |
| Response Speed | Trr | μsec | 5 Max. [at di/dt=100A/μsec] |
| Thermal Drift of Vh | | %/℃ | ±0.08 Max. [at If(n)] |
| Thermal Drift of Vo | | mV/℃ | ±1 Max. [at 0A] |
| Dielectric Strength | | kV | AC 2.5 [with 50 or 60 Hz 1min.] |
| Insulation Resistance | | Ω | 500M Min. [at 500V DC] |
| Operating Temperature | Ta | ℃ | -20 to +80 |
| Storage Temperature | Ts | ℃ | -25 to +85 |
| Hysteresis Error | | mV | ±10 Max. [at If --> 0] |

Dimensions

Unit : mm

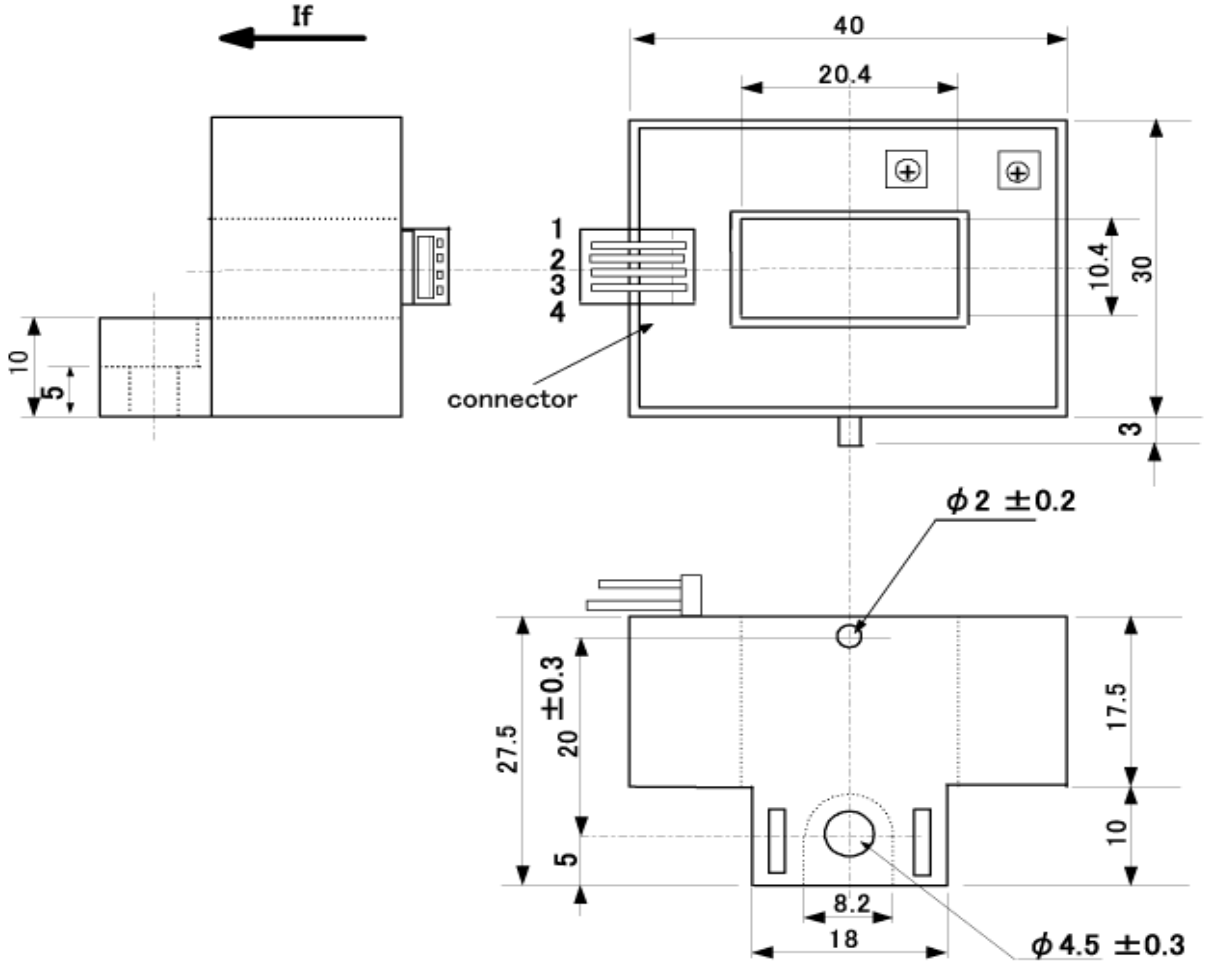


Connector Type[22-12-1042] Maker[Molex]

CS-21003

| Product Name | Mass |
|---|---|
| CS-20GF | 54g |

## Connection

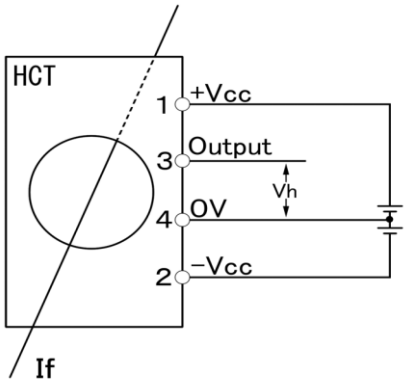


NANA ENGINEERING CO.,LTD.
Machida 310 Irago building 4F
1-22-5 Morino, Machida-shi, Tokyo 194-0022
E-Mail : nanaeng_sales@nana-e.com
URL : http://www.nana-e.com

*The specification (in this catalogue) are subject to minor changes without prior notice.

The edition of April 2025