

## Features

- High reliability
- Compact and lightweight
- Low power consumption
- Low cost

Open Loop Type




## Specifications

Ta=25°C

Product name	Code:1365		CS-50S
	Symbol	Unit	
Nominal input current	If(n)	AT	±500
Saturation current	If(s)	AT	-500~+800
Nominal Output Voltage	Vh	V	Vo±2±0.050 [at If(n)]
Load resistance	RL	Ω	10k
Offset Voltage	Vo	V	2.5±0.050 [at 0A]
Supply Voltage	Vcc	V DC	+11.4~+12.6
Consumption Current	Icc	mA	25 Max.
Response Speed	Trr	μ sec	5 Max. [at di/dt=100A/μ sec]
Thermal Drift of Vh		%/°C	±0.1 Max. [at If(n)]
Thermal Drift of Vo		mV/°C	±1 Max. [at 0A]
Dielectric Strength		kV	AC 2.5 [with 50 or 60 Hz 1min.]
Insulation Resistance		Ω	500M Min. [at 500V DC]
Operating Temperature	Ta	°C	-20 to +80
Storage Temperature	Ts	°C	-25 to +85
Hysteresis Error		mV	±20 Max. [at If --> 0]

Dimensions

Unit : mm

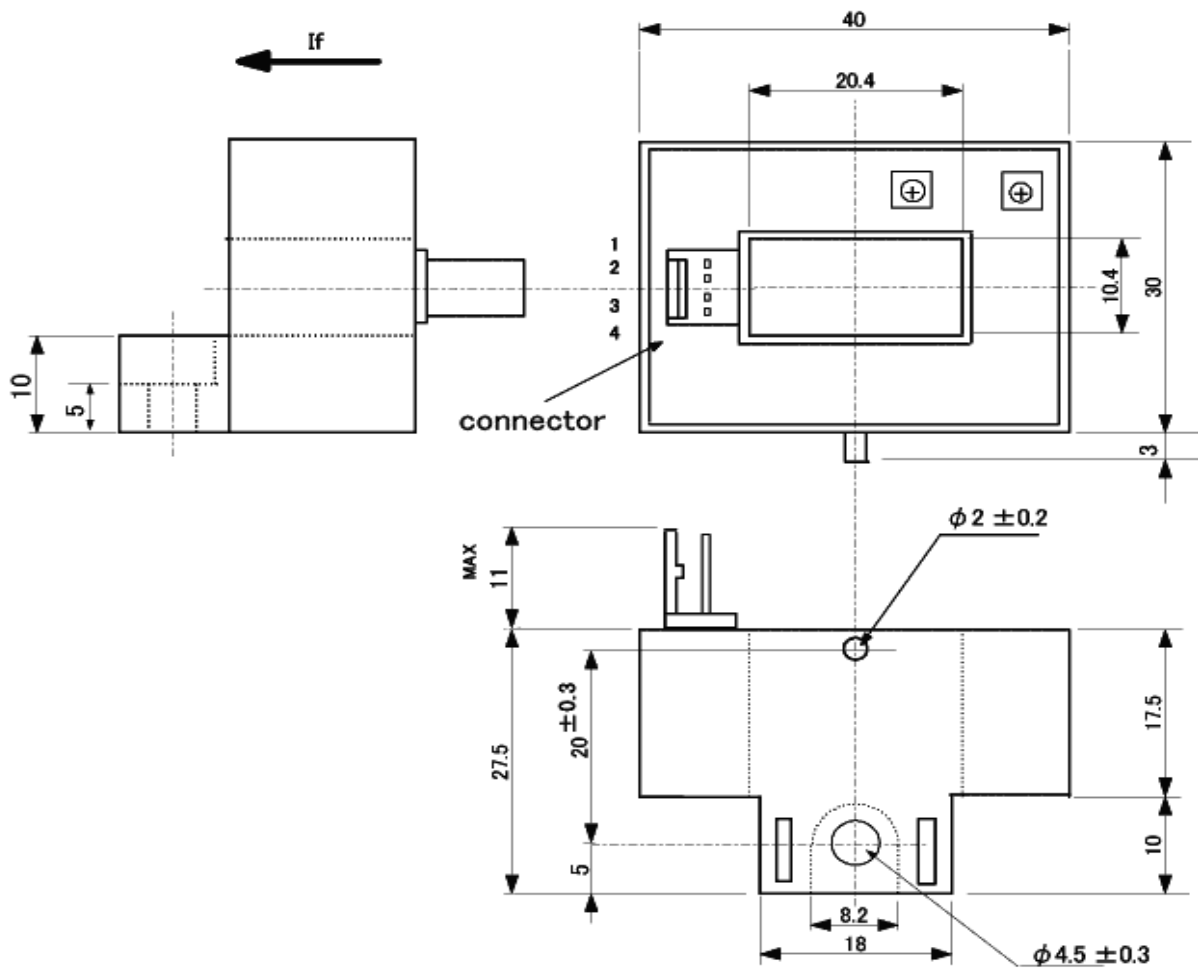


Connector Type[22-11-1041] Maker[Molex]

CS-21002

Product Name	Mass
CS-50S	53g

Connection

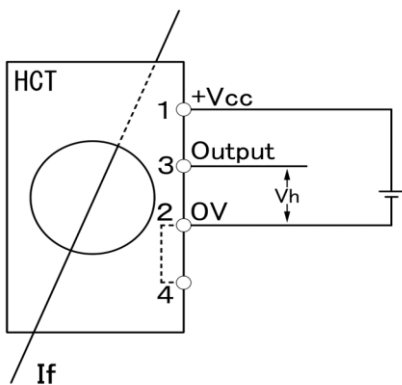

**NANA** ENGINEERING CO.,LTD.

Machida 310 Irago building 4F  
 1-22-5 Morino, Machida-shi, Tokyo 194-0022  
 E-Mail : nanaeng\_sales@nana-e.com  
 URL : <http://www.nana-e.com>