NANA ENGINEERING

High Quality HVT Type Voltage Sensor

Bipolar power supply Chassis mounting

Features

Low thermal drift

Extended measuring range

Voltage detector for AC and DC

Excellent linearity

Completely insulated from the primary side

Open Loop Type

RoHS Compliant

Specifications

Ta=25℃

Product name	Code:2272		HVT-100
	Symbol	Unit	
Nominal input Voltage	Vin	V	±100
Saturation Voltage	Vin(s)	V	±150
Nominal Output Voltage	Vout	V	±4±0.080 [at Vin]
Offset Voltage	Vo	V	0±0.030 [at 0V]
Supply Voltage	Vcc	V DC	±15±5%
Consumption Current	Icc	mA	±25 Max.
Response Speed	Trr	μsec	50 Max.
Thermal Drift of Vh		%/℃	Within±0.08 [at V=V(in)]
Thermal Drift of Vo		mV/℃	Within ±1.5 [at V=0]
Dielectric Strength		kV	AC 2.5 [with 50 or 60 Hz 1min.]
Insulation Resistance		Ω	500M Min. [at 500V DC]
Operating Temperature	Ta	℃	-20 to +70
Storage Temperature	Ts	℃	-25 to +85

Dimensions

Unit : mm

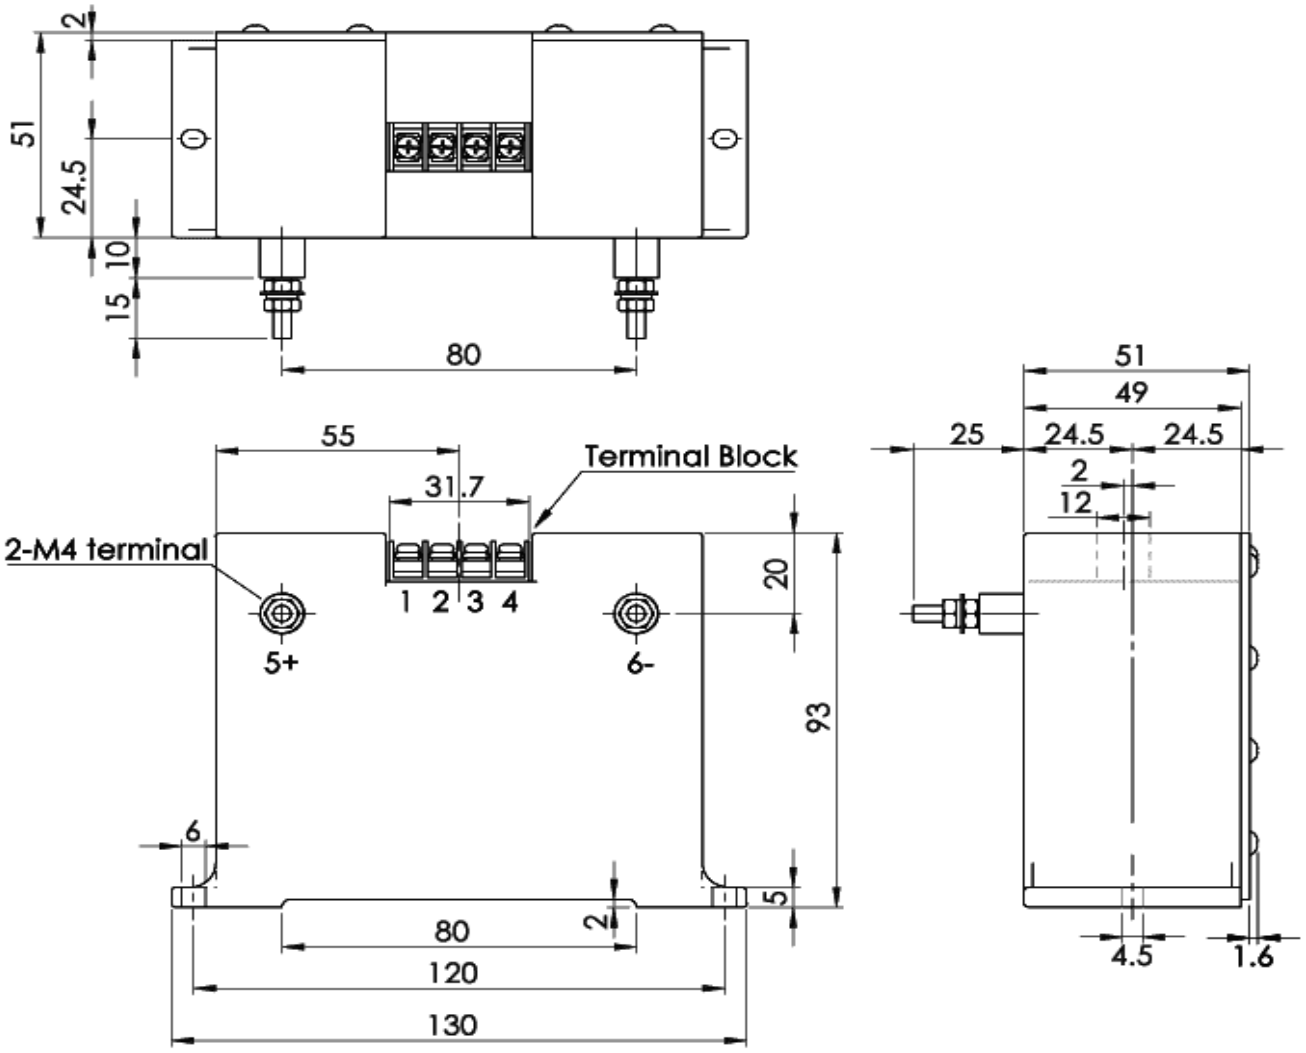

Terminal Block Type[F2060AX-4P(M3)] Maker[FUJICON]

HVT-21035

Product Name
HVT-100

Connection

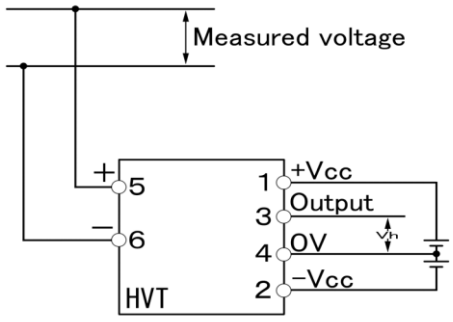

NANA ENGINEERING CO.,LTD.
Machida 310 Irago building 4F
1-22-5 Morino, Machida-shi, Tokyo 194-0022
E-Mail : nanaeng_sales@nana-e.com
URL : http://www.nana-e.com

*The specification (in this catalogue) are subject to minor changes without prior notice.

The edition of March 2023